


WZA-H



- *额定电流/电压: AC16A 250V
- *温度范围: 0~320℃
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 200~3000mm
- *通断温度差: 2~12℃
- *主要应用: 封口机、热熔器、电焊机等电热产品
- *Rate: AC16A 250V
- *Temperature Range: 0~320℃
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 200~3000mm
- *On-off Temperature Difference: 2~12℃
- *Application: Sealing machine, PPR, melting machine, etc.

■ 电路图 Diagram

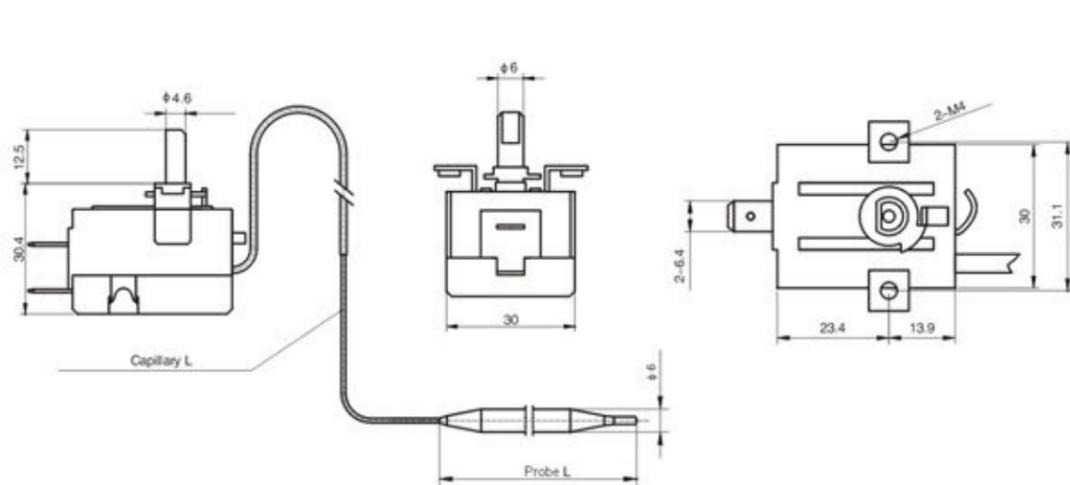


WZA-S



- *额定电流/电压: AC16A 250V
- *温度范围: 0~320℃
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 200~3000mm
- *通断温度差: 2~12℃
- *主要应用: 烤箱、扒炉、油炸锅、热水器、开水桶等
- *Rate: AC16A 250V
- *Temperature Range: 0~320℃
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 200~3000mm
- *On-off Temperature Difference: 2~12℃
- *Application: Oven, griddle, fryer, heater, boiler, etc.

■ 电路图 Diagram

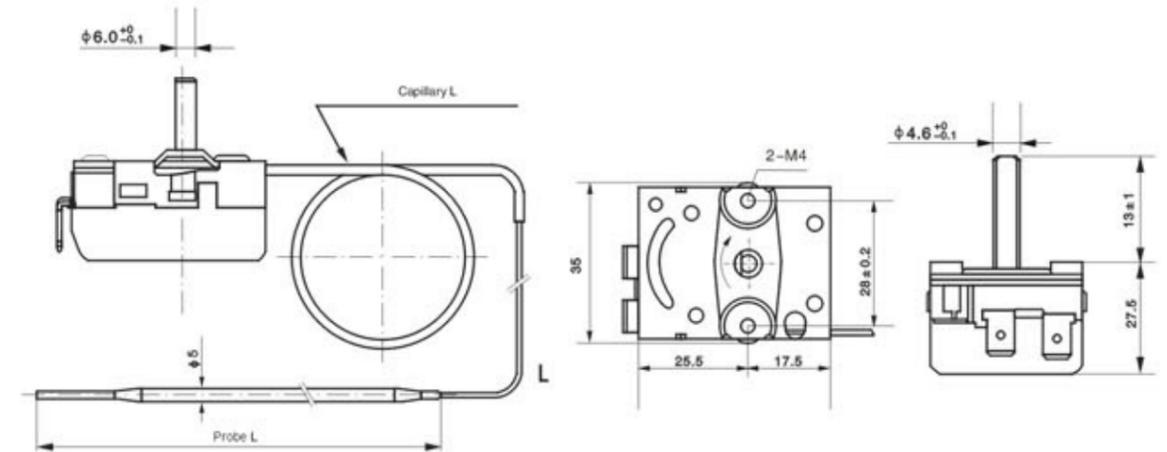


WZA-K



- *额定电流/电压: AC16A 250V
 - *温度范围: 0~320℃
 - *温包直径: 6mm
 - *温包长度: 根据温度来定
 - *最大使用环境温度: T150
 - *毛细管长度: 200~3000mm
 - *通断温度差: 2~12℃
 - *主要应用: 烤箱, 扒炉, 油炸锅, 热水器, 开水桶等
- *Rate: AC16A 250V
 - *Temperature Range: 0~320℃
 - *Probe Dia: 6mm
 - *Probe Length: as different temperatures
 - *Application Environment Temperature: T150
 - *Length of Capillary tube: 200~3000mm
 - *On-off Temperature Difference: 2~12℃
 - *Application: Oven,griddle,fryer,heater,boiler,etc.

■ 电路图 Diagram

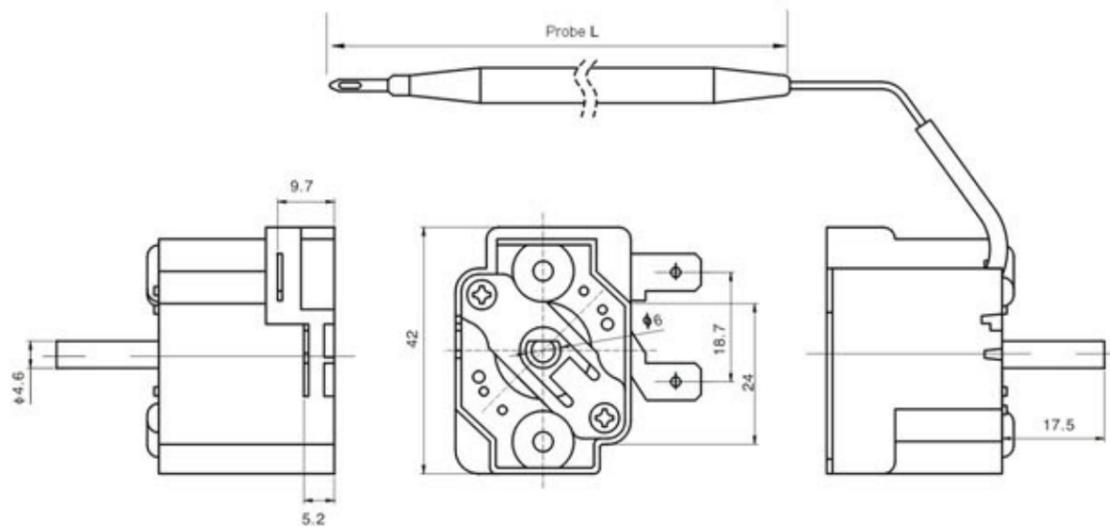


WZA-C



- *额定电流/电压: AC16A 250V
 - *温度范围: 0~320℃
 - *温包直径: 6mm
 - *温包长度: 根据温度来定
 - *最大使用环境温度: T150
 - *毛细管长度: 200~3000mm
 - *通断温度差: 2~12℃
 - *主要应用: 烤箱, 扒炉, 油炸锅, 热水器, 开水桶等
- *Rate: AC16A 250V
 - *Temperature Range: 0~320℃
 - *Probe Dia: 6mm
 - *Probe Length: as different temperatures
 - *Application Environment Temperature: T150
 - *Length of Capillary tube: 200~3000mm
 - *On-off Temperature Difference: 2~12℃
 - *Application: Oven,griddle,fryer,heater,boiler,etc.

■ 电路图 Diagram

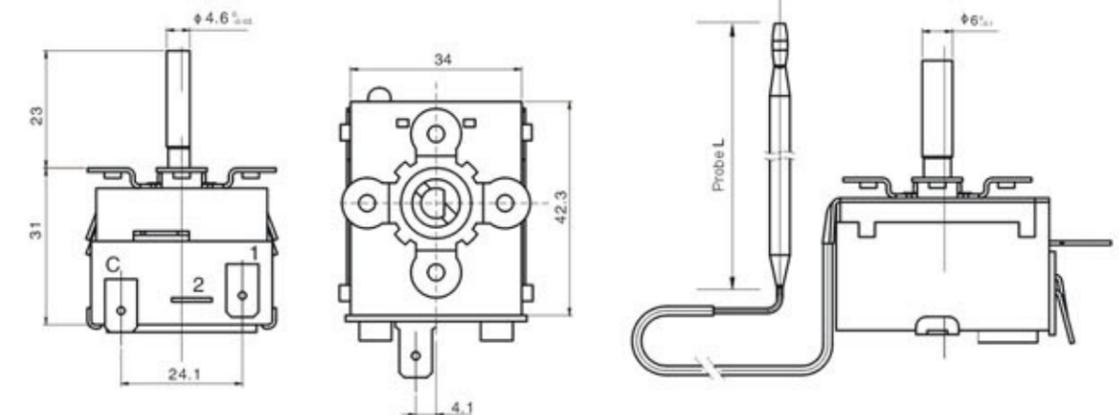


WZA-D



- *额定电流/电压: AC16A 250V
- *温度范围: 0~320°C
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 200~3000mm
- *通断温度差: 2~12°C
- *主要应用: 烤箱, 扒炉, 油炸锅, 热水器, 开水桶等

- *Rate: AC16A 250V
- *Temperature Range: 0~320°C
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 200~3000mm
- *On-off Temperature Difference: 2~12°C
- *Application: Oven,griddle,fryer,heater,boiler,etc.

■ 电路图 Diagram

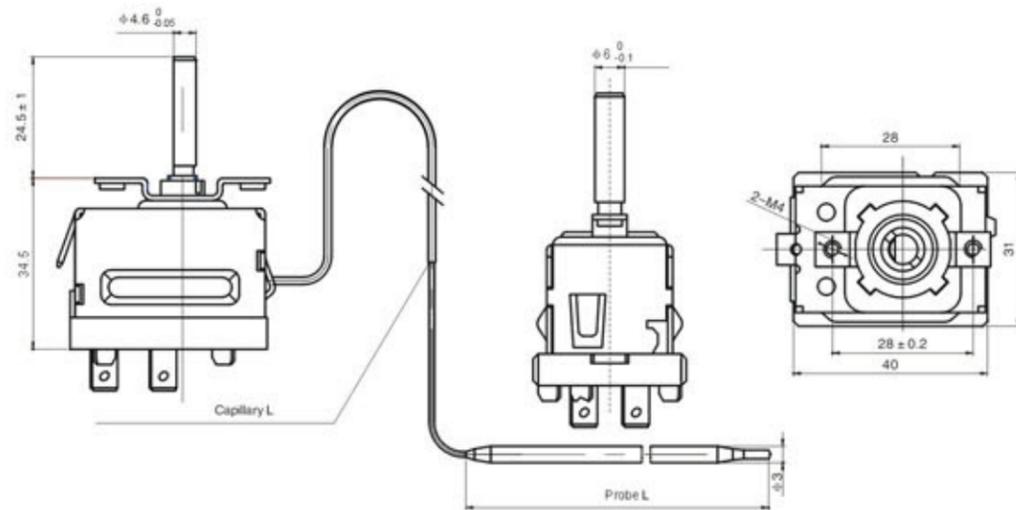


WZA-711



- *额定电流/电压: AC16A 250V
- *温度范围: -35~35°C
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 1500mm
- *通断温度差: 3~5°C
- *主要应用: 保鲜柜、冷库、制冰机、冷饮机等

- *Rate: AC16A 250V
- *Temperature Range: -35~35°C
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 1500mm
- *On-off Temperature Difference: 3~5°C
- *Application: fresh-keeping tanks, ice machines, coolers,etc.

■ 电路图 Diagram

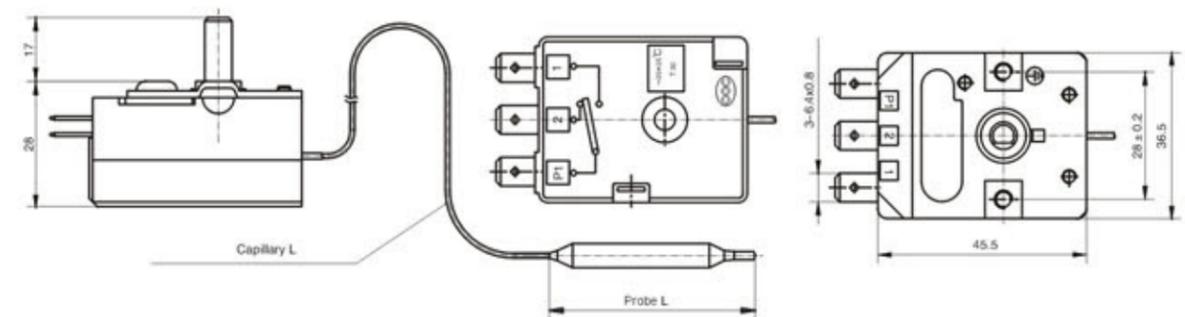


WZA-F2000



- *额定电流/电压: AC16A 250V
- *温度范围: -35~35°C
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 1500mm
- *通断温度差: 3~5°C
- *主要应用: 保鲜柜、冷库、制冰机、冷饮机等

- *Rate: AC16A 250V
- *Temperature Range: -35~35°C
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 1500mm
- *On-off Temperature Difference: 3~5°C
- *Application: fresh-keeping tanks, ice machines, coolers, etc.

■ 电路图 Diagram

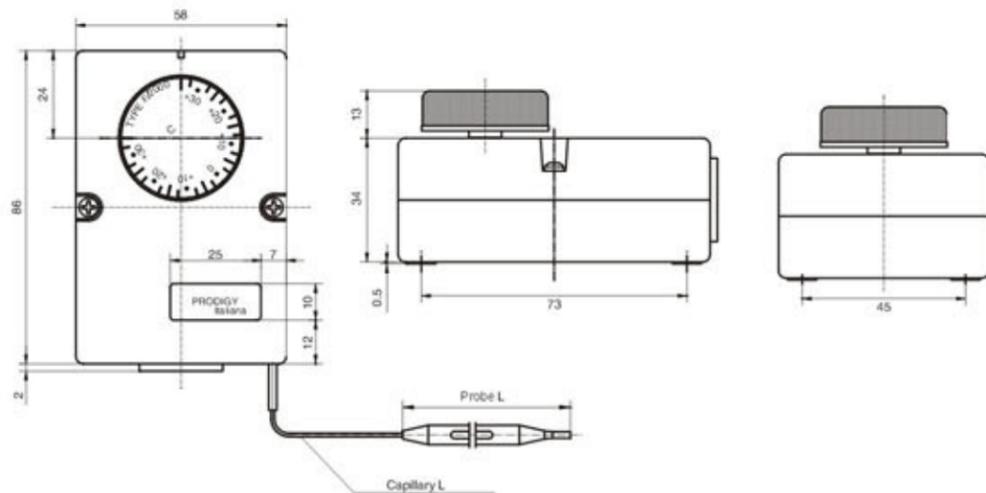


WZA-T




- *额定电流/电压: AC16A 380V
- *温度范围: 0~320°C
- *温包直径: 6mm
- *温包长度: 根据温度来定
- *最大使用环境温度: T150
- *毛细管长度: 200~3000mm
- *通断温度差: 2~12°C
- *主要应用: 烤箱、扒炉、油炸锅、热水器、开水桶等

- *Rate: AC16A 380V
- *Temperature Range: 0~320°C
- *Probe Dia: 6mm
- *Probe Length: as different temperatures
- *Application Environment Temperature: T150
- *Length of Capillary tube: 200~3000mm
- *On-off Temperature Difference: 2~12°C
- *Application: Oven, griddle, fryer, heater, boiler, etc.

■ 电路图 Diagram

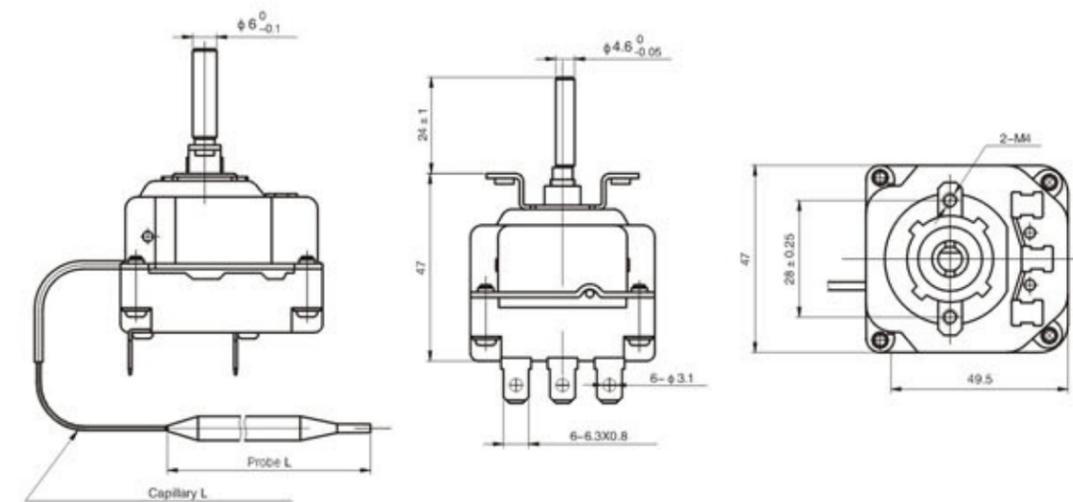


WZA-G

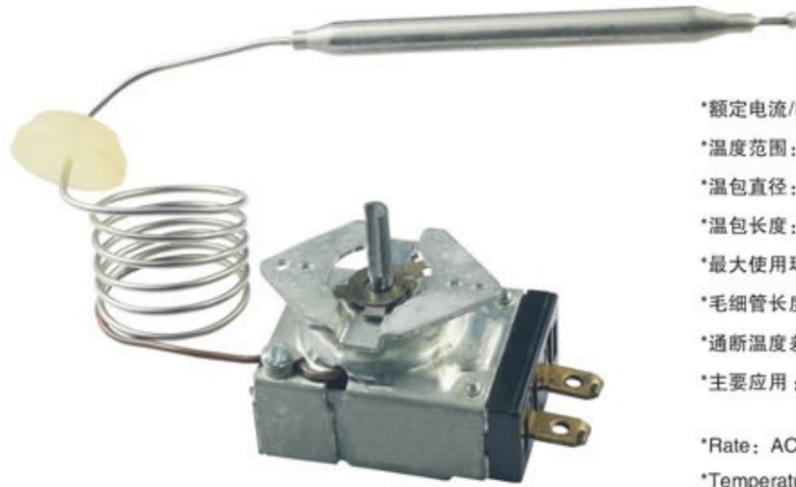

- *额定电流/电压: AC25A 250V
 - *温度范围: 0-320°C
 - *温包直径: 6mm
 - *温包长度: 根据温度来定
 - *最大使用环境温度: T150
 - *毛细管长度: 200-3000mm
 - *通断温度差: 2-12°C
 - *主要应用: 烤箱, 扒炉, 油炸锅, 热水器, 开水桶等
- *Rate: AC16A 250V
 - *Temperature Range: 0-320°C
 - *Probe Dia: 6mm
 - *Probe Length: as different temperatures
 - *Application Environment Temperature: T150
 - *Length of Capillary tube: 200-3000mm
 - *On-off Temperature Difference: 2-12°C
 - *Application: Oven,griddle,fryer,heater,boiler,etc.

■ 电路图 Diagram

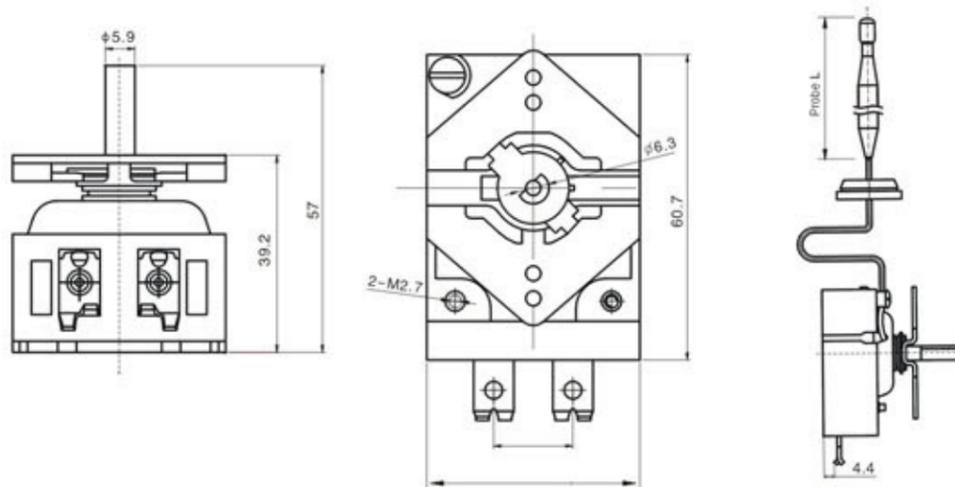


WZA-A



- *额定电流/电压: AC16A 250V
 - *温度范围: 30-320°C
 - *温包直径: 6mm
 - *温包长度: 根据温度来定
 - *最大使用环境温度: T150
 - *毛细管长度: 200-3000mm
 - *通断温度差: 2-12°C
 - *主要应用: 烤箱, 扒炉, 油炸锅, 热水器, 开水桶等
- *Rate: AC16A 250V
 - *Temperature Range: 30-320°C
 - *Probe Dia: 6mm
 - *Probe Length: as different temperatures
 - *Application Environment Temperature: T150
 - *Length of Capillary tube: 200-3000mm
 - *On-off Temperature Difference: 2-12°C
 - *Application: Oven,griddle,fryer,heater,boiler,etc.

■ 电路图 Diagram

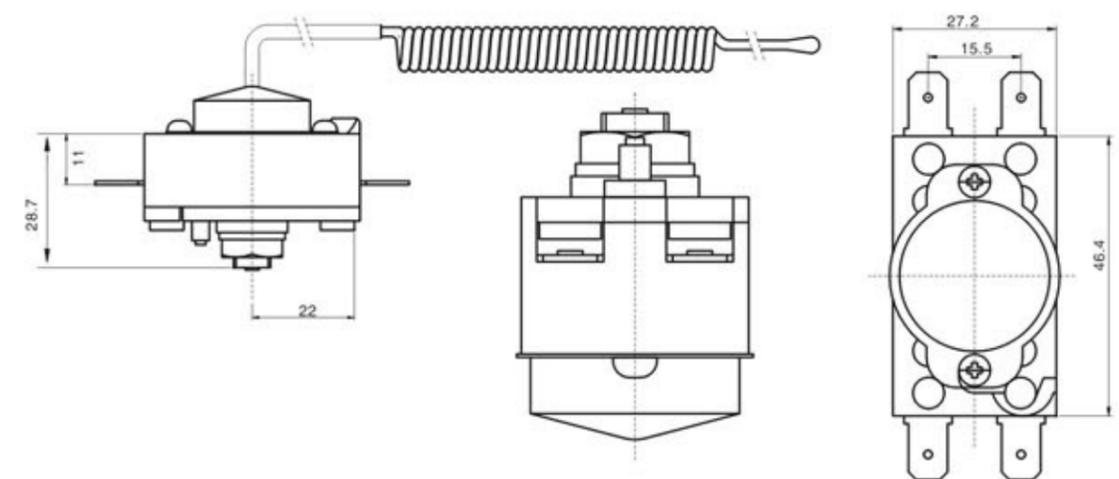

Accessories

Rocker Switch



指示灯 Pilot lamp



Accessories

Knob

