



WZA-B 系列

适用于电热水器、电开水器、电烤箱、电暖风机、洗衣机、电炸锅、厨房设备等。

设计温度：-35~350℃

通断温度差：2~12℃


常用控制范围：0~40℃ 30~85℃ 30~90℃ 30~110℃

50~300℃ 50~350℃

额定电压、电流：AC250V 16A

安装孔中心距：28mm配M4螺丝

注：可按客户要求定制

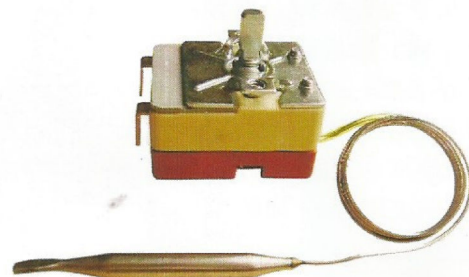

WZA-B SERIES

General purpose thermostat recommended for most applications, such as water heaters, fan heaters, washing machines, air conditioning, boilers, ovens, deep fryers, rotisserie, ventilation, sauna, SPA, incubator, wine cellar, fridge, hot & cool dispenser and medical equipment as well.

Temperature Range:-35~350℃

Differential:2~12℃

General operating temperature: 0~40℃ 30~85℃ 30~90℃ 30~110℃ 50~300℃ 50~350℃

Rated voltage and current:AC250V 16A

Mounting bracket center holes:28mm with M4 screw

Note: Specification can be customized according to your requests.

WZA-B 手动复位系列

适用于电热水器、电开水器、电烤箱、电暖风机、洗衣机、电炸锅、厨房设备等。

设计温度：-35~350℃


通断温度差：2~12℃

常用控制范围：0~40℃ 30~85℃ 30~90℃ 30~110℃ 50~300℃ 50~350℃

额定电压、电流：AC250V 16A

安装孔中心距：28mm配M4螺丝

注：可按客户要求定制

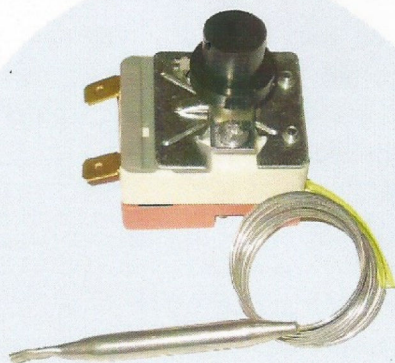

WZA-B MANUAL-RESET SERIES

General purpose thermostat recommended for most applications, such as water heaters, fan heaters, washing machines, air conditioning, boilers, ovens, deep fryers, rotisseries, ventilations, saunas, SPA, incubators, wine cellars, fridges, hot & cool dispensers and medical equipment as well.

Temperature Range:-35~350℃


Differential:2~12℃

General operating temperature: 0~40℃ 30~85℃ 30~90℃ 30~110℃ 50~300℃ 50~350℃

Rated voltage and current:AC250V 16A

Mounting bracket center holes:28mm with M4 screw

Note: Specification can be customized according to your requests.

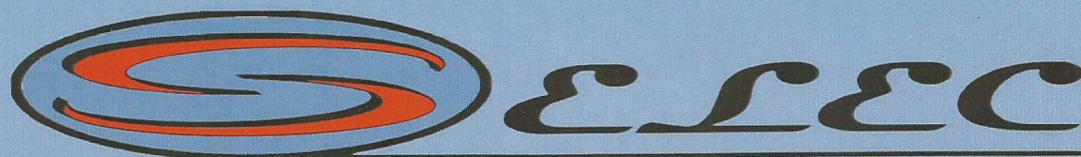

WZA-E 系列

适用于电热水器、电开水器、电烤箱、电暖风机、洗衣机、电炸锅、厨房设备等。

设计温度：-35~350℃

通断温度差：2~12℃


常用控制范围：0~40℃ 30~85℃ 30~90℃ 30~110℃

50~300℃ 50~350℃

额定电压、电流：AC250V 16A

安装孔中心距：28mm配M4螺丝

注：可按客户要求定制

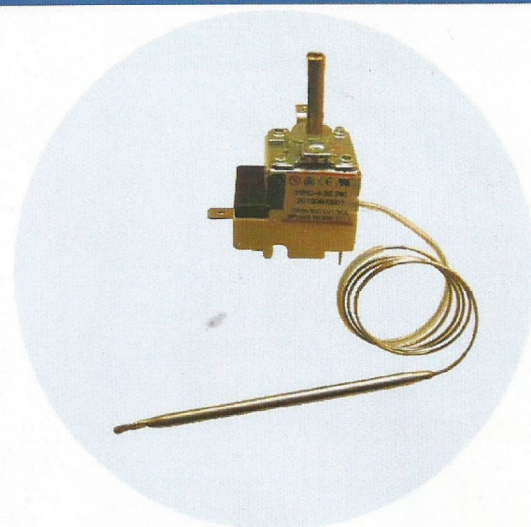

WZA-E SERIES

Widely used in most applications, such as ovens, rotisseries, deep fryers, boilers, water heaters, hot & cool dispensers, washing machines, air conditioning, ventilation, saunas, Spas, incubators, wine cellars, fridges, and medical equipment as well.

Temperature Range:-35~350℃

Differential:2~12℃

General operating temperature: 0~40℃ 30~85℃ 30~90℃ 30~110℃ 50~300℃ 50~320℃

Rated voltage and current:AC250V 16A

Mounting bracket center holes:28mm with M4 screw

Note: Specification can be customized according to your requests.

WZA-E (带防水配件系列)

WKC (带防水配件系列)


适用于电热水器、电开水器、电烤箱、电暖风机、洗衣机、电炸锅、厨房设备等。

设计温度：-35~350℃ 通断温度差：2~12℃

额定电压、电流：AC250V 16A

安装孔中心距：28mm配M4螺丝

注：可按客户要求定

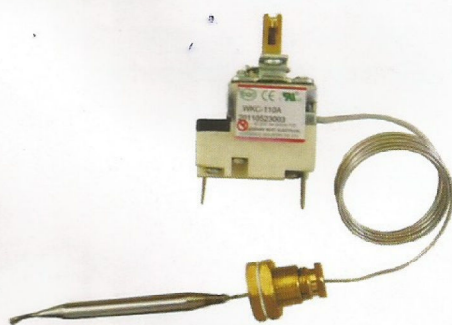

WZA-E WATERPROOF ACCESSORIES SERIES

Widely used in most applications, such as ovens, rotisseries, deep fryers, boilers, water heaters, hot & cool dispensers, washing machines, air conditioning, ventilation, saunas, Spas, incubators, wine cellars, fridges, and medical equipment as well.

Temperature Range:-35~350℃

Differential:2~12℃

Rated voltage and current:AC250V 16A

Mounting bracket center holes:28mm with M4 screw

Note: Specification can be customized according to your requests.